

ANCO MANUFACTURING

2625 Theo Mocke Street, Piet Retief, 2380
P.O. Box 882, Piet Retief, 2380, South Africa

Tel: +27 17 826 6023

www.ancoman.co.za



High Pressure PRO - Slip-on Unit (Bakkie Sakkie)

TYPICAL APPLICATIONS:


- Intended for Professional Forestry and Veld-fire management situations where high-pressure water delivery (40 Bar) combined with higher flow rates of 30 – 40 l/min (compared to traditional high pressure units) are required for clearing high fuel loads in under canopy conditions and for direct fire attack. Also suitable where higher head heights and higher elevation terrain require extra pressure to ensure maximum water delivery.

TYPICAL USERS:

- Foresters and forestry contractors / first responders / fast attack units / agriculture / mining / industrial.

STANDARD FEATURES:

- Unique T-tank design allowing fitment to any vehicle (fits between most wheel arches). Tanks manufactured from durable UV-stabilised Linear Low Density Polyethylene (LLDPE) material (3 year tank warranty against fractures and material failure)
- Sturdy Galvanized Top-Frame bolted to top of tank. Galvanized Top-Frame accommodates all assembled equipment.
- Unique base-plate design allows for secure fitment of engine and pump assembly.
- Honda GX200 (6.5 Hp) pull-start petrol engine, close coupled to ANCO ML30X3 High-pressure piston pump. No V-belts or pulleys.

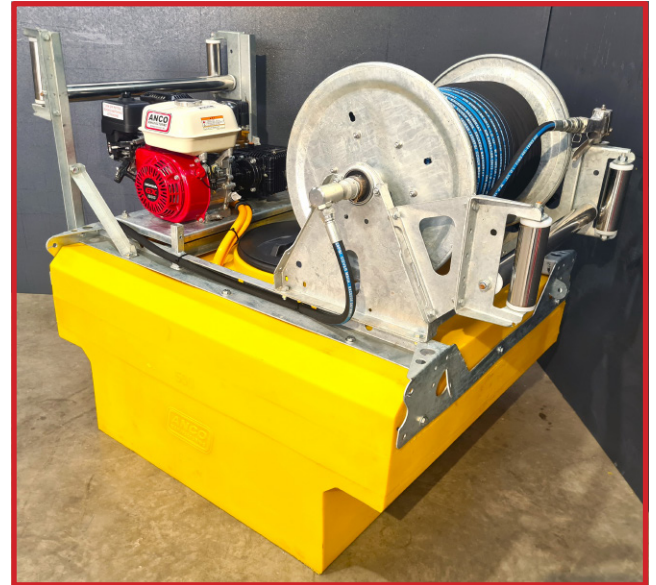

- 100m x 13mm Single Steel-braided high pressure hose with High Pressure quick couplings.
- Durable and sturdy heavy duty hose reel with hydraulic rotating coupling and manual rewind - handle.
- 1 x G20 Aluminium pistol-grip discharge nozzle.
- 4 x tie down eye-lids on top frame for secure fastening to your truck bed.
- Stainless Steel fair-lead roller guides to assist with hose deployment and retrieval – left and right.

TANK SIZES & DIMENSIONS

	Length (L)	Width (W)	Tank Height (TH)	Total Height (H)
400 L	1020 mm	1220 mm	400 mm	970 mm
500 L	1020 mm	1220 mm	470 mm	1040 mm
600 L	1020 mm	1220 mm	550 mm	1120 mm
700 L	1020 mm	1220 mm	620 mm	1190 mm

HIGH PRESSURE PRO - PERFORMANCE:

- Maximum operating pressure - 60 Bar.
- Maximum discharge rate up to 40 L/min @ 60 Bar pressure

OPTIONAL EXTRAS:

- ANCO Tank Baffles
- Truck-bed mounting kit
- PVC canvas pump & engine cover
- Venturi-suction system to allow suction from open water source
- Electric rewind hose reel

