

## ANCO MANUFACTURING

2625 Theo Mocke Street, Piet Retief, 2380  
P.O. Box 882, Piet Retief, 2380, South Africa

Tel: +27 17 826 6023

[www.ancoman.co.za](http://www.ancoman.co.za)

# ANCO

## MANUFACTURING

### Low Pressure / High Volume Slip-on Unit (*Bakkie Sakkie*)

#### TYPICAL APPLICATIONS:


- Veld fire / brush fire situations where higher flow rates are required to douse higher heat intensity and high fuel load fires

#### TYPICAL USERS:

- Foresters and forestry contractors / first responders / farmers / game farm managers.

#### STANDARD FEATURES:

- Unique T-tank design allowing fitment to any vehicle (fits between most wheel arches). Tanks manufactured from durable UV-stabilised Linear Low Density Polyethylene (LLDPE) material (3 year tank warranty against fractures and material failure)
- Sturdy Galvanized Top-Frame bolted to top of tank. Galvanized Top-Frame accommodates all assembled equipment.
- Pump close coupled to Honda Engine on sturdy galvanised base plate.
- Honda GX160 (5.5Hp) recoil-start, petrol engine direct coupled to ANCO MP50 centrifugal pump.
- 60m x 20mm high quality rubber hose with Geka couplings
- Stainless Steel fair-lead roller guides to assist with hose deployment and retrieval – left and right

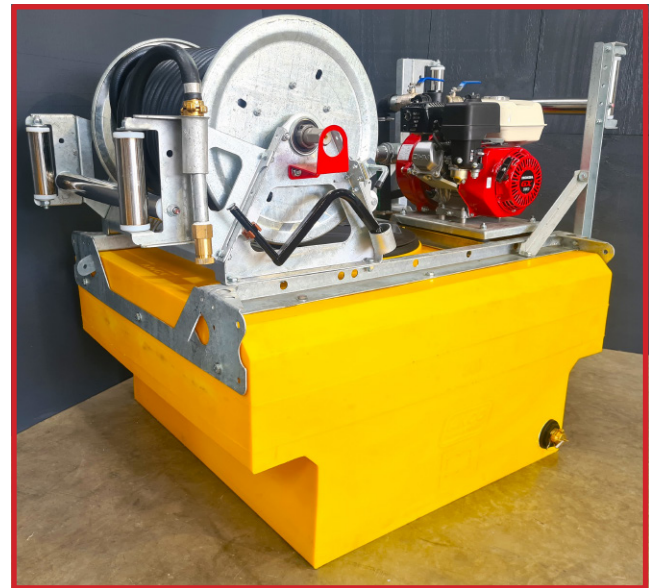

- Durable and sturdy heavy duty hose reel with hydraulic rotating coupling and manual rewind - handle.
- 1x Adjustable brass discharge nozzle.
- 5m x 65mm flexi suction hose with Cam-lock couplings, foot valve & strainer. Suction hose is stored inside water tank.
- 4x tie down eye-lids on top frame for secure fastening to your truck bed (tie down mounting kit available as optional extra).

#### TANK SIZES & DIMENSIONS

	Length (L)	Width (W)	Tank Height (TH)	Total Height (H)
400 L	1020 mm	1220 mm	400 mm	970 mm
500 L	1020 mm	1220 mm	470 mm	1040 mm
600 L	1020 mm	1220 mm	550 mm	1120 mm
700 L	1020 mm	1220 mm	620 mm	1190 mm

#### LOW PRESSURE UNIT PERFORMANCE:

- Maximum operating pressure - 7 Bar.
- Maximum flow rate of 300 L/min @ max. engine RPM

#### OPTIONAL EXTRAS:

- ANCO Tank Baffles
- Truck-bed mounting kit
- PVC canvas pump & engine cover
- TFT Twister 10/24 selectable gallonage nozzle
- Electric rewind hose reel

